

PART NO:	KH-CSUFASTSM	ISSUE NO:	0202
DATE OF ISSUE:	21-10-2021	PAGE:	3 of 3

CONNECTOR OPTICO FAST SC/UPCS.M.

Applications

- CATV
- Metro
- Telecommunication networks
- Local Area Network (LAN)
- Data processing networks
- Test equipment

Feature

- Low Insertion Loss and high return loss
- Professional factory
- Fast delivery

Type: SC fast Connector

Size: Simplex


Body Material: Plastic

Housing Color: Blue/Beige/Green

Remark: Ferrule Concentricity SM<1um, MM<1.4um

Ferrule diameter tolerance +/-0.5um

Ferrule inner diameter tolerance +1/-0um

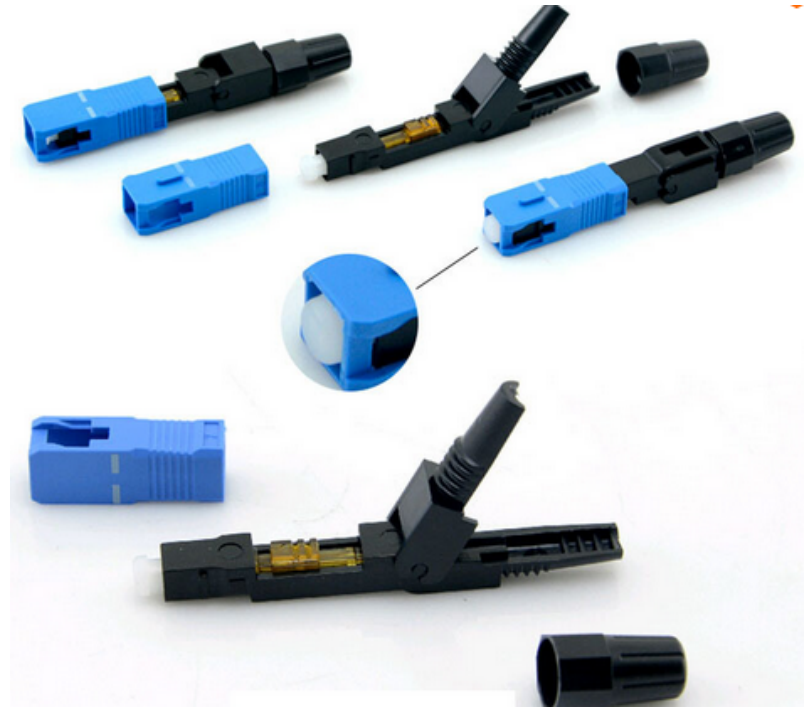

Item	Insertion Loss	Durability(1000 Mating)	Storage Temperature	Operating Temperature
SM/PC	<0.30dB	≤0.30dB	-40°C- +85°C	-40°C- +75°C
SM/APC	<0.20dB	≤0.20dB		
MM/PC	<0.30dB	≤0.30dB		

Khomax Industrial Technology Co., Ltd.

Headquarters:

Rooms 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong. / Tel: 852- 2710 8200 Fax: 852- 2710 8266

www.khomax.com

sales@khomax.com

Instructions:



1. Remove the tail cover and put it in the leather line



2. Stripped leather line for 5cm



3. Remove the outside coating of the finisher with a Miller clamp



4. Wipe the core with a dust-proof cloth



7. Tighten the leather line with the tail cover on the leather line



6. Insert the core into the cold protector against the embedded core



5. Cut the core with a cutting blade

