



Product Specifications

PART NO:	CON6711FED	ISSUE NO:	0902
DATE OF ISSUE:	09-07-2021	PAGE:	1 of 1

CONNECTOR RG-11 FEED THRU RFC




SPECIFICATIONS:

Bandwidth: DC to 1GHz
Nominal Impedance: 75 ohm
Return Loss : > 30 dB @1GHz
Insertion Loss : < 0.1 dB @1GHz
Operating Range : - 40°C to + 60°C
Interface: Standard 5/8-24 UNEF Thread Fit RG11 60% to Quad shield

FEATURES:

- Part numbers are permanently marked on the connector for easy identification.
- Uses 6262 aluminum alloy for excellent corrosion resistance.
- Moisture-proof through durability design and implementation of UV ozone-resistant EPDM o-rings.
- Same hexagon size used on both main body and back unit.
- All facilities meet ISO 9001 standards.

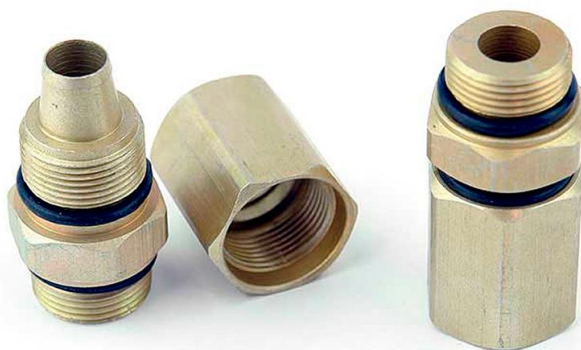

Headquarters:

Rooms 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong. / Tel: 852- 2710 8200 Fax: 852- 2710 8266